


## Female Header 2.0 mm

SMT Series





### SPECIFICATIONS

Current Rating: 2 A  
 Insulator Resistance: 3000 MOhm min.  
 Contact Resistance: 20 mOhm max.  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -40°C ~ +105°C  
 Soldering Temperature: 260°C for 3~5 sec. max  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T  
 Finish: Tin, Gold or Duplex Plated  
 Standard: Gold Flash all over  
 Note: Duplex Plating: Gold Plated on contact area, Tin on solder area



F429-MGN-D060-XX





F429-MGN-D060-XX-A

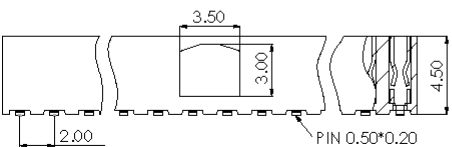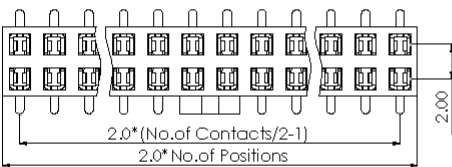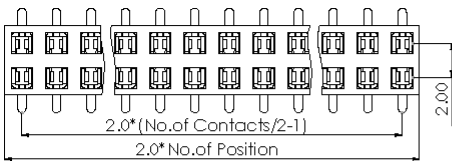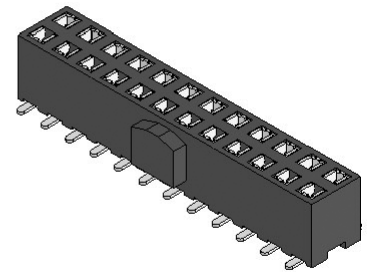

[F429]



[F429] -A

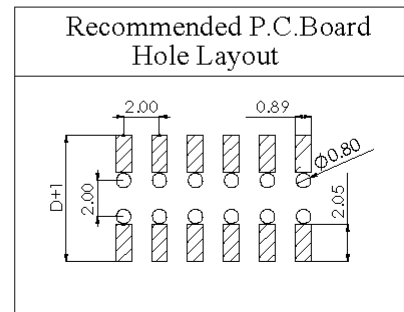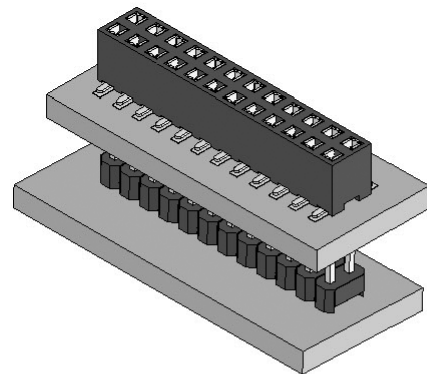

### How to order

Unit: mm

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
<b>FXXX</b>	<b>- X</b>	<b>X</b>	<b>X -</b>	<b>DXXX</b>	<b>- XX</b>	<b>- A</b>
F429:F/H 2.00 H:4.50 Dual Row	M:SMT Type	G:Gold Flash T: Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	M-D D060	(04 TO 80 Contacts)	A: With cutting polarization key