


## Female Header 2.0 mm

SMT Series



### SPECIFICATIONS

- Current Rating: 2 A
- Insulator Resistance: 3000 MOhm min.
- Contact Resistance: 20 mOhm max.
- Dielectric Withstanding: AC 500 V
- Operating Temperature: -40°C ~ +105°C
- Soldering Temperature: 260°C for 3~5sec. max
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0
- Standard: Nylon-6T
- Finish: Tin, Gold or Duplex Plated
- Standard: Gold Flash all over
- Note: Duplex Plating: Gold Plated on contact area, Tin on solder area



F432-MGN-D056-XX




F432-MGN-D056-XX-P

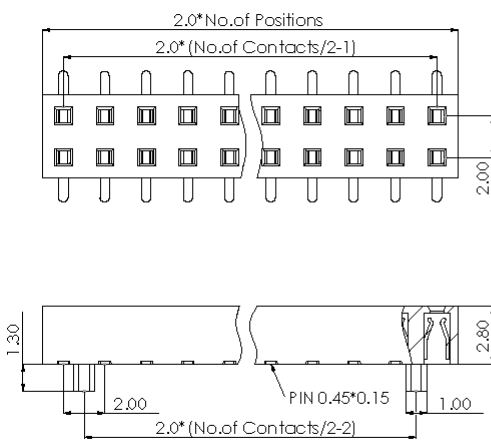


[F432]



[F432] -P

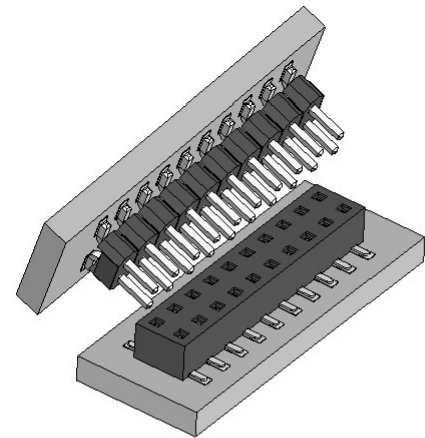

Recommended P.C.Board Hole Layout

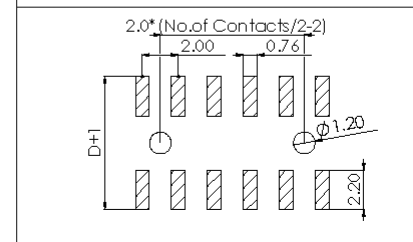

### How to order

Unit: mm

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
<b>FXXX</b>	<b>- X</b>	<b>X</b>	<b>X -</b>	<b>DXXX</b>	<b>- XX</b>	<b>- P</b>
F432:F/H 2.00 H:2.80 Dual Row	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	M-D D056	(04 TO 80 Contacts)	P:PEG