Female Header 2.0 mm

SMT Series

SPECIFICATIONS

Current Rating: 2 A
Insulator Resistance: 3000 MOhm min.
Contact Resistance: 20 mOhm max.
Dielectric Withstanding: AC 500 V
Operating Temperature: -40°C ~ +105°C
Soldering Temperature: 260°C for 3~5 sec. max.
Contact Material: Phosphor Bronze
Insulator Material: Polyester, UL 94V-0
Standard: Nylon-6T
Finish: Tin, Gold or Duplex Plated
Standard: Gold Flash all over
Note: Duplex Plating: Gold Plated on contact area, Tin on solder area

F433-MGN-D056-XX-PRC

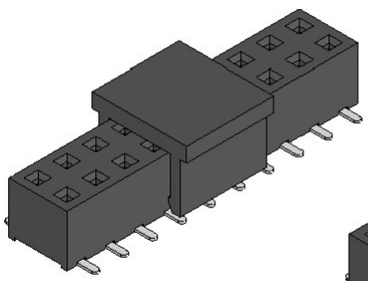

F433-MGN-D056-XX

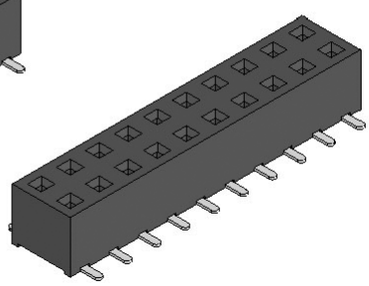

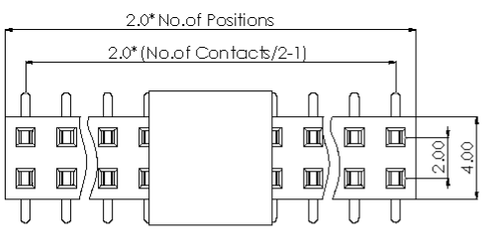

[F433]



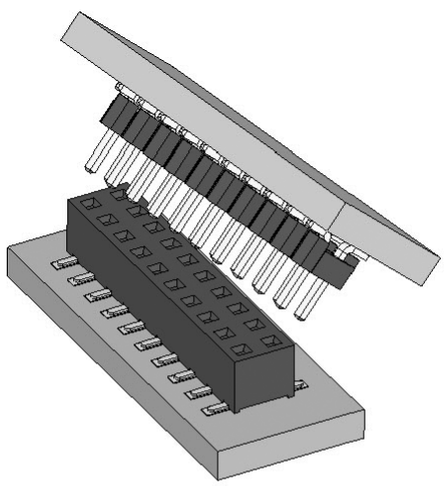

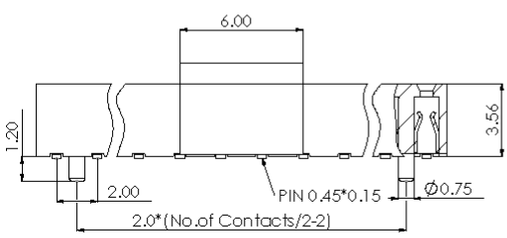



[F433] -PRC

Recommended P.C.Board Hole Layout



How to order

Unit: mm

Series		Connector Type	Contact Plating	Material		Pin Length mm	Number of Contacts		Other
FXXX	-	X	X	X	-	DXXX	- XX	-	PRC
F433:F/H 2.00 H:3.56 Dual Row		M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ◎Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)		M-D D056	(04 TO 80 Contacts)		P:PEG R:REEL C:CAP

All specifications subject to change without notice.