


Female Header 2.54 mm

180° Series



SPECIFICATIONS

- Current Rating: 3 A
- Insulator Resistance: 5000 MOhm min.
- Contact Resistance: 20 mOhm max.
- Dielectric Withstanding: AC 1000 V
- Operating Temperature: -40°C ~ +105°C
- Soldering Temperature: 260°C for 3~5 sec. max
- Contact Material: Brass
- Insulator Material: Polyester, UL 94V-0
- Standard: P.B.T.
- Finish: Tin, Gold or Duplex Plated
- Standard: Gold Flash all over
- Note: Duplex Plating: Gold Plated on contact area, Tin on solder area





F201-KGP-D030-XX



F201-KTP-D030-XX-BK

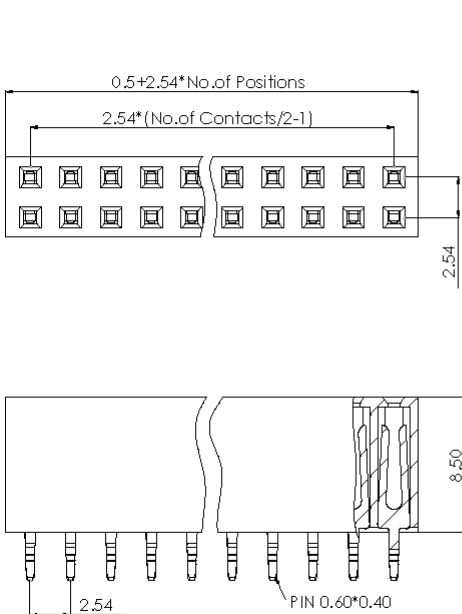

[F201] -BK



[F201]

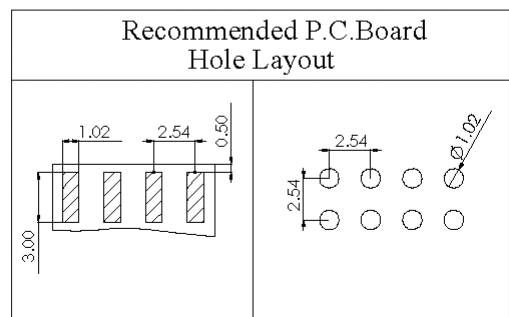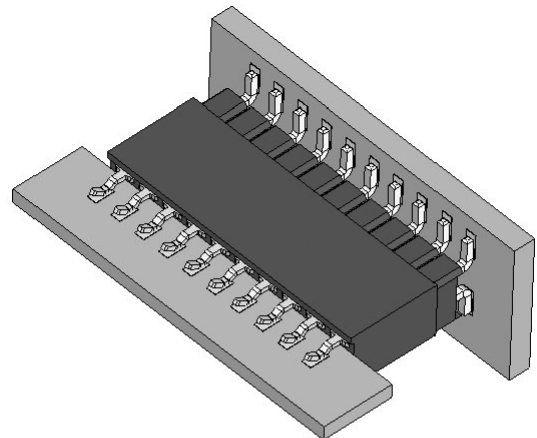

How to order

Unit: mm

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
FXXX	X	X	X	DXXX	XX	BK
F201:F/H 2.54 H:8.50 Dual Row	K:"K" Type K:1.30 ⋮	G:Gold Flash T: Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT N:Nylon-6T (Standard:P)	K-D D030	(04 TO 80 Contacts)	BK:KINK#3~#6