


## Female Header 2.54 mm

SMT Series



### SPECIFICATIONS

- Current Rating: 3 A
- Insulator Resistance: 5000 MOhm min.
- Contact Resistance: 20 mOhm max.
- Dielectric Withstanding: AC 1000 V
- Operating Temperature: -40°C ~ +105°C
- Soldering Temperature: 260°C for 3~5 sec. max
- Contact Material: Brass
- Insulator Material: Polyester, UL 94V-0
- Standard: Nylon-6T
- Finish: Tin, Gold or Duplex Plated
- Standard: Gold Flash all over
- Note: Duplex Plating: Gold Plated on contact area, Tin on solder area





F201-KGN-D072-XX

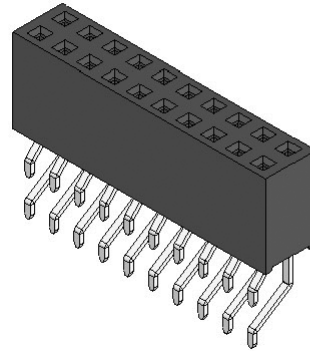


F201-MGN-D078-XX

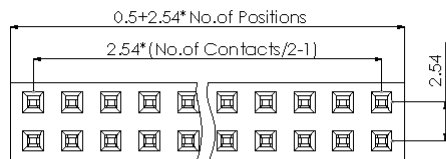

[F201]

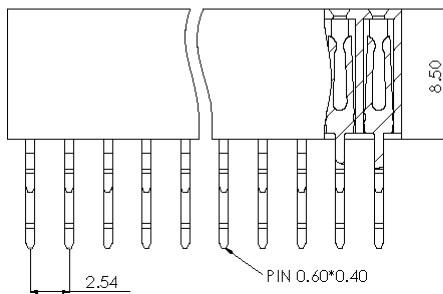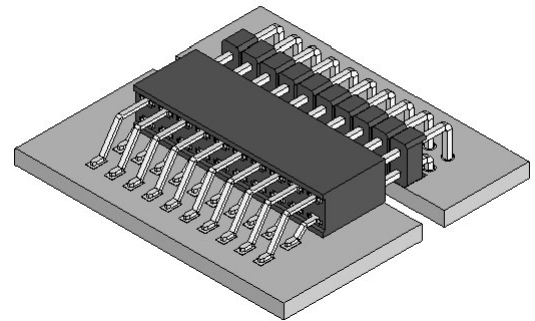

[F201]

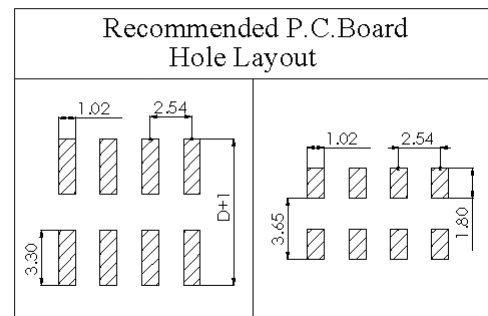

### How to order

Unit: mm

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<b>FXXX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>DXXX</b>	<b>XX</b>
F201:F/H 2.54 H:8.50 Dual Row	M:SMT Type K:"K" Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	M-D D078 K-D D072	(04 TO 80 Contacts)