


Female Header 2.54 mm

90° & SMT Series


SPECIFICATIONS

Current Rating: 3 A
 Insulator Resistance: 5000 MOhm min.
 Contact Resistance: 20 mOhm max.
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: -40°C ~ +105°C
 Soldering Temperature: 260°C for 3~5sec. max
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold or Duplex Plated
 Standard: Gold Flash all over
 Note: Duplex Plating: Gold Plated on contact area, Tin on solder area


F108-MGN-D105-XX







F208-MGN-D112-XX




F208-RGN-D030-XX





F108-RGA-D030-XX

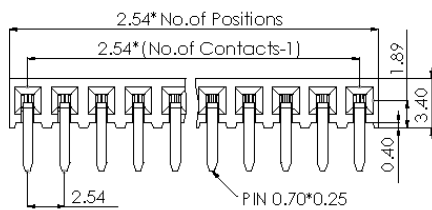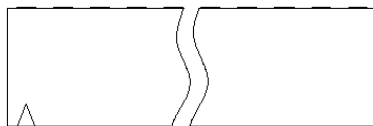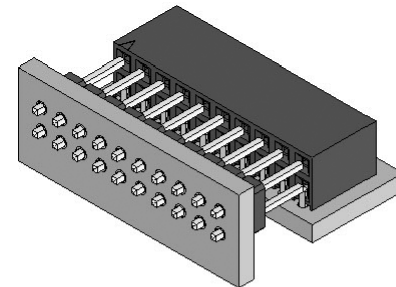


[F108]





[F108]

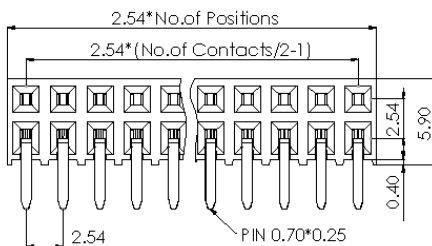

[F208]



[F208]

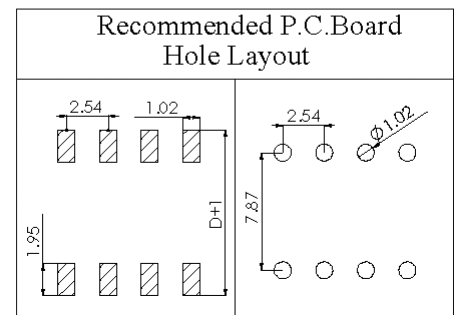

How to order

Unit: mm

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
FXXX	X	X	X	DXXX	XX
F108:F/H 2.54 H:8.10 Single Row F208:F/H 2.54 H:8.10 Dual Row	R:Right Angle M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT A:PA46 N:Nylon-6T	R-D D030 M-D D105 D112	F108:(02 TO 40 Contacts) F208:(04 TO 80 Contacts)