


Female Header 2.54 mm

90° Series


SPECIFICATIONS

Current Rating: 3 A
 Insulator Resistance: 5000 MOhm min.
 Contact Resistance: 20 mOhm max.
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: -40°C ~ +105°C
 Soldering Temperature: 260°C for 3~5 sec. max
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: P.B.T.
 Finish: Tin, Gold or Duplex Plated
 Standard: Gold Flash all over
 Note: Duplex Plating: Gold Plated on contact area, Tin on solder area



F194-LGP-D030-XX






F294-L2GP-D030-XX





F294-L1GP-D030-XX

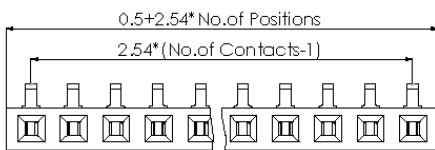



[F194]

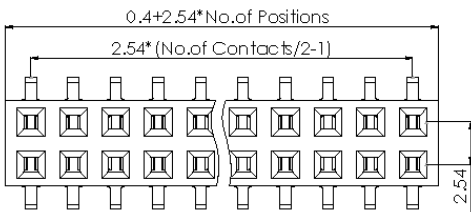

[F294]

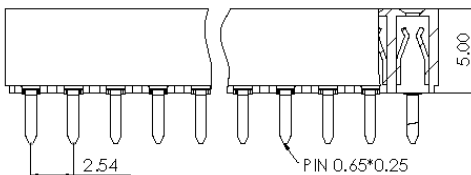

[F294]

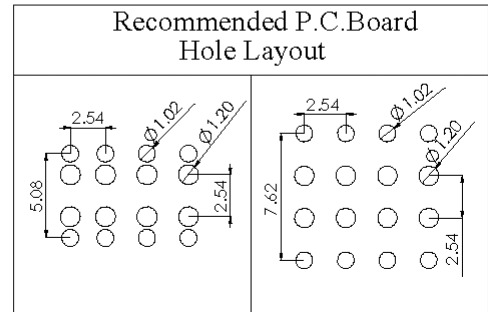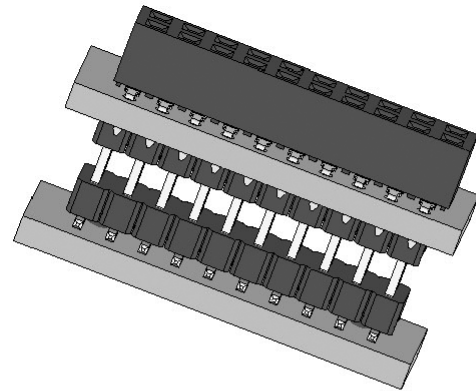

How to order

Unit: mm

| Series | Connector Type | Contact Plating | Material | Pin Length mm | Number of Contacts |
|--|---|---|-------------------------------------|---------------|--|
| FXXX | - X | X | X | - DXXX | - XX |
| F194:F/H 2.54 H:5.00 Single Row F294:F/H 2.54 H:5.00 Dual Row | L:Pin Type L1:7.62 L2:5.08 ... | G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G) | P:PBT N:Nylon-6T (Standard:P) | L-D D030 | F194:(02 TO 40 Contacts) F294:(04 TO 80 Contacts) |