


## Box Header 1.0 mm

SMT Series







### SPECIFICATIONS

Current Rating: 0.8 A  
 Insulator Resistance: 900 MOhm min.  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -40°C ~ +105°C  
 Soldering Temperature: 260°C for 3~5 sec. max  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T  
 Standard: Gold Flash all over  
 Note: Duplex Plating: Gold Plated on contact area, Tin on solder area

**B810-M1GN-D064-XX-P**



**B810-M1GN-D064-XX**

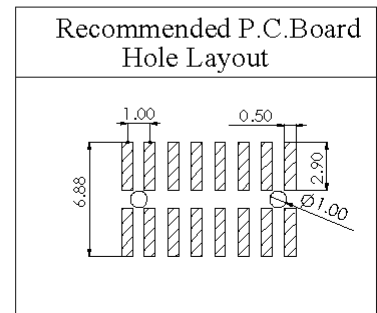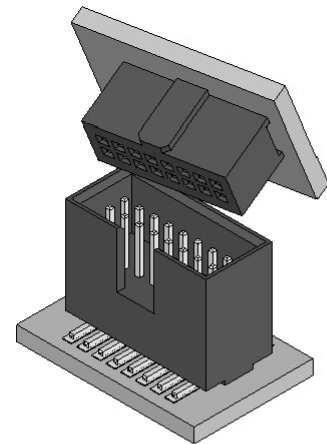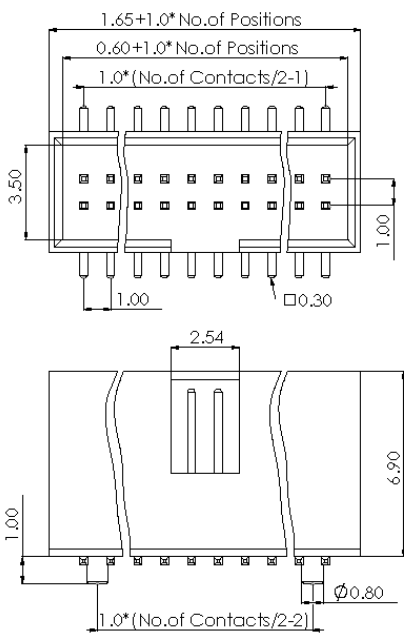

### How to order

Unit: mm

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
<b>BXXX</b>	<b>- X</b>	<b>X</b>	<b>X</b>	<b>- DXXX</b>	<b>- XX</b>	<b>- P</b>
B810: B/H 1.00 H: 6.90 Dual Row	M: SMT Type M1: 0.15 M2: 0.20 M3: 0.23 ...	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T	M-D D064	(10 TO 60 Contacts)	P: PEG