


Box Header 1.27 mm 90° & 180° & SMT Series


SPECIFICATIONS

Current Rating: 1 A
 Insulator Resistance: 1000 MOhm min.
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -40°C ~ +105°C
 Soldering Temperature: 260°C for 3~5 sec. max
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold or Duplex Plated
 Standard: Gold Flash all over
 Note: Duplex Plating: Gold Plated on contact area, Tin on solder area



B621A-RTGN-D035-XX







B621A-SGN-D032-XX



B621A-MDGN-D085-XX

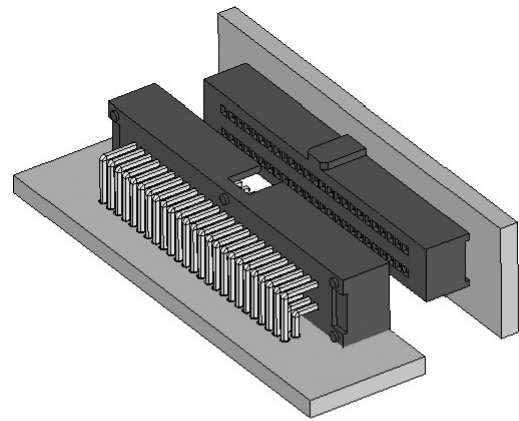


[B621A]

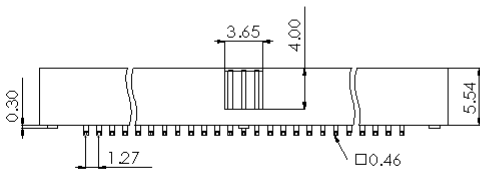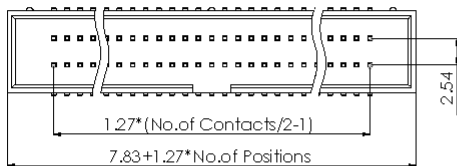

[B621A]

[B621A]

Recommended P.C.Board Hole Layout

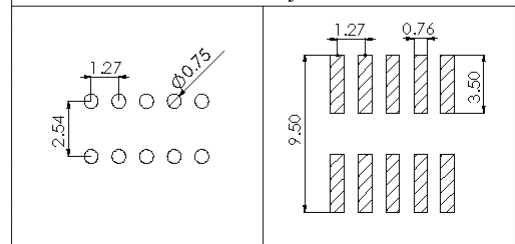

How to order

Unit: mm

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
BXXX	- X	X	X	- DXXX	- XX
B621A: B/H 1.27 H: 5.54 Dual Row	S: Straight Type R: Right Angle RT: 2.20 : M: SMT Type MD: 0.46 :	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ⊙ Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T	S-D D032 R-D D035 M-D D085	(10 TO 100 Contacts)