
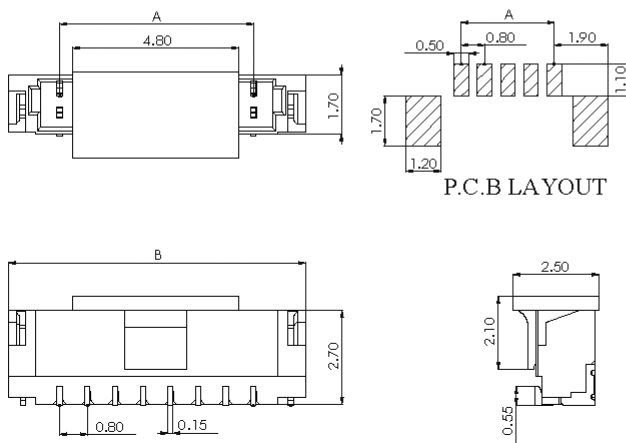
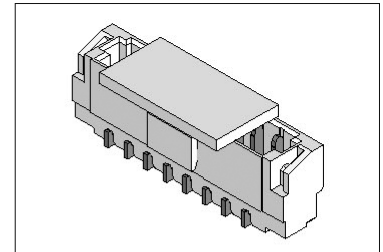


Wafer 0.8 mm

SUR080 Series

SPECIFICATIONS

Current Rating: 0.5 A, AC/DC
 Voltage Rating: 30 V AC/DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20 mOhm max.
 Insulator Resistance: 100 MOhm min.
 Withstanding Voltage: AC 200 V / minute
 Finished: Tin-plated / Gold-plated
 Housing Material: Nylon-6T, UL 94V-0






Number of Contacts
CC0801 -W08 -XX
 (02 TO 20 Contacts)

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
2PIN	0.80	3.80	10PIN	7.20	10.20
4PIN	2.40	5.40	12PIN	8.80	11.80
6PIN	4.00	7.00	14PIN	10.40	13.40
7PIN	4.80	7.80	16PIN	12.00	15.00
8PIN	5.60	8.60	17PIN	12.80	15.80
9PIN	6.40	9.40	20PIN	15.20	18.20

Unit: mm

SPECIFICATIONS

Current Rating: 0.5 A, AC/DC
 Voltage Rating: 30 V AC/DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20 mOhm max.
 Insulator Resistance: 100 MOhm min.
 Withstanding Voltage: AC 200 V / minute
 Finished: Tin-plated / Gold-plated
 Housing Material: Nylon-6T, UL 94V-0

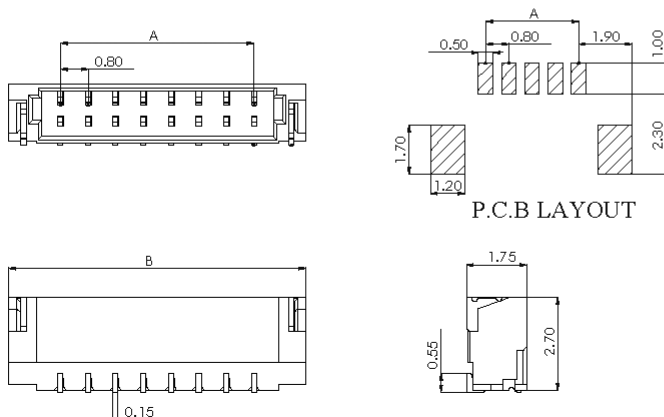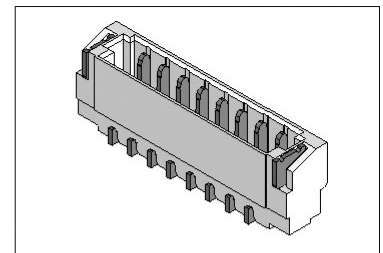

Connector Type
CC0801 -W08 R -XX
 R: Right Angle (02 TO 20 Contacts)

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
2PIN	0.80	3.80	10PIN	7.20	10.20
4PIN	2.40	5.40	12PIN	8.80	11.80
6PIN	4.00	7.00	14PIN	10.40	13.40
7PIN	4.80	7.80	16PIN	12.00	15.00
8PIN	5.60	8.60	17PIN	12.80	15.80
9PIN	6.40	9.40	20PIN	15.20	18.20

Unit: mm