


Female Header 1.0 mm

SMT Series



SPECIFICATIONS

- Current Rating: 0.8 A
- Insulator Resistance: 900 MOhm min.
- Contact Resistance: 20 mOhm max.
- Dielectric Withstanding: AC 500 V
- Operating Temperature: -40°C ~ +105°C
- Soldering Temperature: 260°C for 3~5 sec. max
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0
- Standard: Nylon-6T
- Finish: Tin, Gold or Duplex Plated
- Standard: Gold Flash all over
- Note: Duplex Plating: Gold Plated on contact area, Tin on solder area




F801-MGN-D039-XX-P




F801-MGN-D039-XX

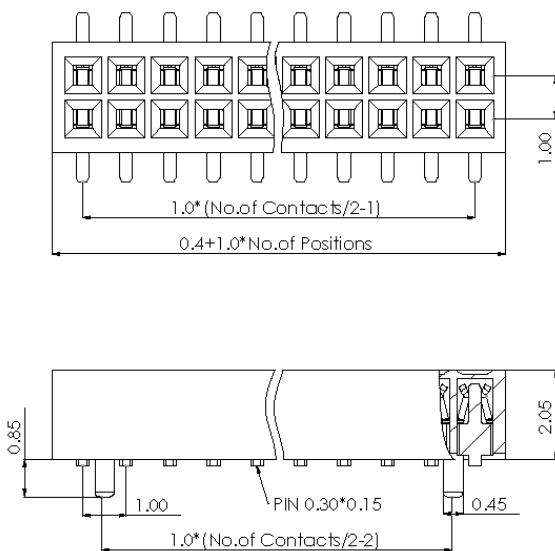

[F801]

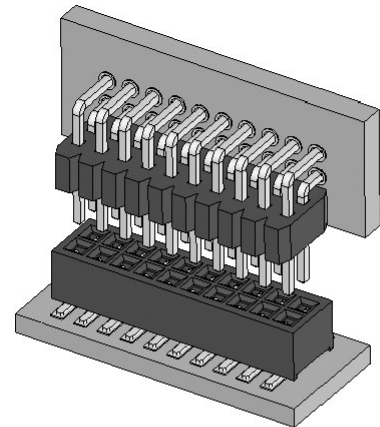

[F801]-P

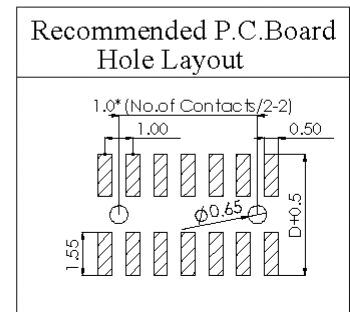

How to order

Unit: mm

| Series | Connector Type | Contact Plating | Material | Pin Length mm | Number of Contacts | Other |
|----------------------------------|----------------|--|----------------------------|---------------|------------------------|------------|
| FXXX | - X | X | X - | DXXX | - XX | - P |
| F801:F/H 1.00 H:2.05 Dual Row | M:SMT Type | G:Gold Flash T: Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G) | N:Nylon-6T (Standard:N) | M-D D039 | (04 TO 80 Contacts) | P:PEG |