


Female Header 1.0 mm

SMT Series



SPECIFICATIONS

- Current Rating: 0.8 A
- Insulator Resistance: 900 MOhm min.
- Contact Resistance: 20 mOhm max.
- Dielectric Withstanding: AC 500 V
- Operating Temperature: -40°C ~ +105°C
- Soldering Temperature: 260°C for 3~5 sec. max
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0
- Standard: Nylon-6T
- Finish: Tin, Gold or Duplex Plated
- Standard: Gold Flash all over
- Note: Duplex Plating: Gold Plated on contact area, Tin on solder area



F803-MGN-D039-XX-PRC





F803-MGN-D039-XX

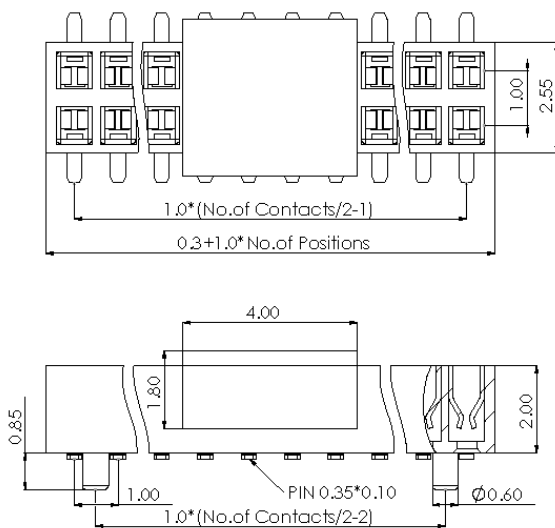

[F803] -P



[F803] -PRC

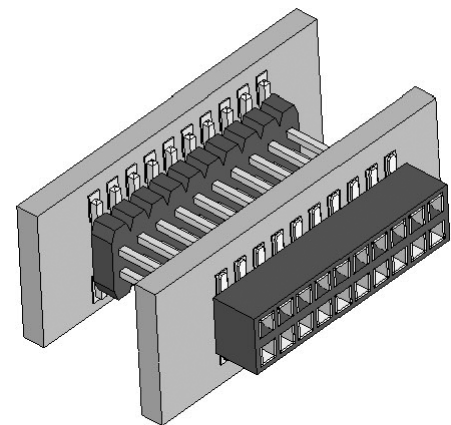

How to order

Unit: mm

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
FXXX	- X	X	X -	DXXX	- XX -	PRC
F803: F/H 1.00 H: 2.00 Dual Row	M: SMT Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ⊙ Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	M-D D039	(04 TO 80 Contacts)	P: PEG R: REEL C: CAP