


## STANDARD CHARACTER MODULES

### YMS 204-02

20 CHAR x 4 LINE, 1/16 DUTY, 1/5 BIAS

#### EXTERNAL DIMENSION AND DISPLAY PATTERN

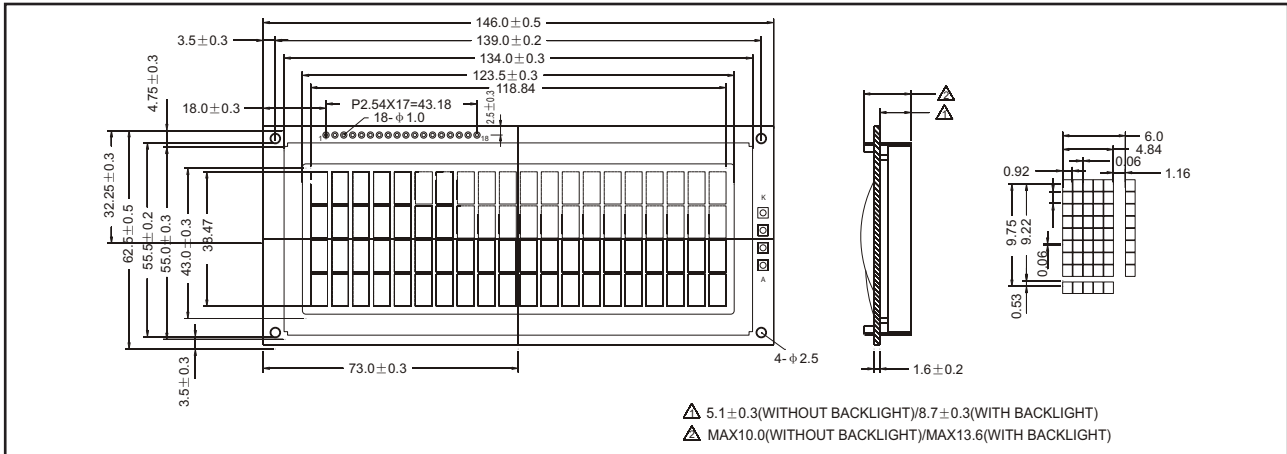

#### MECHANICAL DATA

ITEM	SPECIFICATION	UNIT
Module Size (W x H x T)	146.0 x 62.5 x 13.6/10.0	mm
Viewing Area (W x H)	123.5 x 43.0	mm
Character Font (W x H)	5.0 x 7.0 with cursor	dots
Character Size (W x H)	4.84 x 9.22	mm
Character Pitch (W x H)	6.0 x 9.75	mm
Dot Size (W x H)	0.92 x 1.1	mm

#### ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage Logic	$V_{DD} - V_{SS}$	-0.3	7.0	V
Supply Voltage Drive	$V_{DD} - V_{EE}$	$V_{DD} + 0.3$	$V_{DD} - 13.5$	V
Input Voltage	$V_{IN}$	-0.3	$V_{DD} + 0.3$	V
Operating Temperature		See page 8		
Storage Temperature		See page 8		

#### PIN CONFIGURATION


PIN	SYMBOL	SIGNAL DESCRIPTION
1	$V_{SS}$	GND (0 V)
2	$V_{DD}$	Power Supply (+5.0V)
3	$V_{EE}$	Supply Voltage LCD Driver
4	RS	Register Select - LOW = Instruction, HIGH=DATA
5	R/W	Read / Write LOW = MPU to LCM, HIGH = LCM to MPU
6	E	Enable R/W = LOW: Data are talking over at falling edge R/W = High: Data can be read at E = 1
7 to 14	DB <sub>0</sub> to DB <sub>7</sub>	Data Bus - Software selectable 4 or 8 bit Mode
15	A	Anode of LED Unit
16	K	Cathode of LED Unit
17	$V_{OUT}$	Power Supply Voltage LCD Driver
18	NC	No Connection

#### ELECTRICAL CHARACTERISTICS, $T_a = 25^\circ\text{C}$

ITEM	SYMBOL	CONDITION	SPEC. VALUE			UNIT
			MIN.	TYP.	MAX.	
Supply Voltage (Logic)	$V_{DD} - V_{SS}$		4.5	5.0	5.5	V
Supply Current (Logic)	$I_{DD}$	$V_{DD} = 5V$		2.0	3.0	mA
Input Voltage	HIGH	$V_{IH}$	2.2		$V_{DD}$	V
	LOW	$V_{IL}$	-0.3		0.6	V
Output Voltage	HIGH	$V_{OH}$	$I_{OH} = 0.2mA$	2.4		V
	LOW	$V_{OL}$	$I_{OL} = 1.2mA$		0.4	V
LCD Operating Voltage	$V_{DD} - V_{EE}$	$V_{DD} = 5V$ $T_a = +25^\circ\text{C}$	4.5	4.7	5.0	V
Supply Current LCD Drive	$I_{EE}$			2.99		mA

Note (1): Value is high reliability type. Note (2): Electro-Optical Characteristics: See page 5.

#### BLOCK DIAGRAM

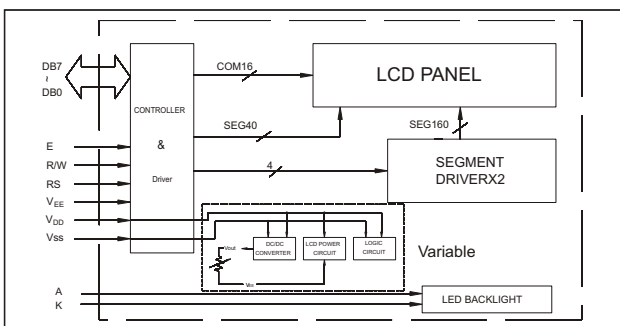

#### BACKLIGHTING CHARACTERISTICS, $T_a = 25^\circ\text{C}$ , LED

ITEM	SYMBOL	CONDITION	SPEC. VALUE			UNIT
			MIN.	TYP.	MAX.	
Supply Voltage	$V_{LED}$			4.1	4.5	V
Power Consumption	$P_{LED}$	$I_F = 770mA$		3157		mW
Luminous	$I_v$	$I_F = 770mA$		150		cd/m <sup>2</sup>